





APPLICATIONS:

Indoor
Natural Gas
LP (Liquid Propane)
B-Vent Chimney
Combustible Floor Installation
Custom Finish


Opening heights sure to make a true statement in any living space with Isokern's **Bvetto Series**.

As the first and only field assembled gas appliance fireplace, the Isokern Bvetto Series offers the largest available opening heights in the industry of 52." With our proprietary quick fire ignition system, the Isokern Bvetto comes complete with our exclusive Isoflames Stadium Burner and Remote Electronic Ignition.

Specifications

Please Note: Different height options are available for the Bvetto fireplace. One additional backwall and two additional sidewalls can be added to obtain an opening of 42" tall before brick is installed. Two additional backwalls and four additional sidewalls can be added to obtain an opening of $52\frac{1}{2}$ " tall before brick is installed. Only Isoflames log sets can be used in this unit.

Framing & Weight						
Model	Minimum Framing	Weight				
36	(46"w) x (65"h) x (26 3/4"d)	1500 lbs				
46	(52"w) x (65"h) x (26 3/4"d)	1700 lbs				

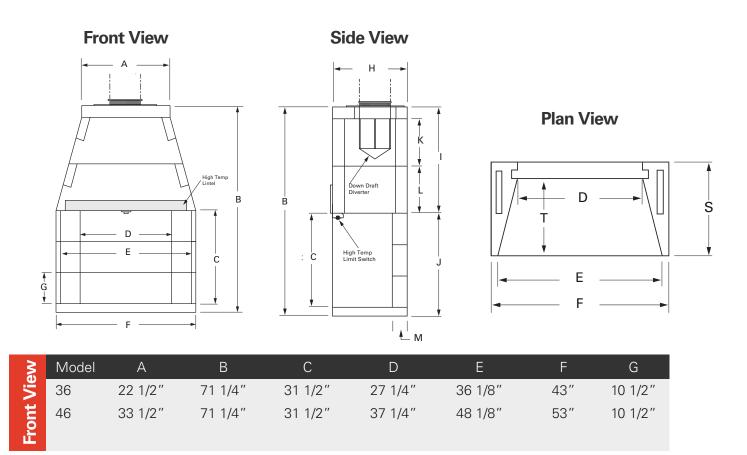

>	Model	В	С	Н	1	J	K	L	M
Vie.	36	71 1/4"	31 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5"
Side	46	71 1/4"	31 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5"

}	Model	D	Е	F	S	T
/iev	46	27 1/4"	36 1/8"	43"	25 1/4"	20 1/4"
Plan \	48	37 1/4"	48 1/2"	53"	25 1/4"	20 1/4"