Isokern Magnum 60" Fireplace



Project Name: _____ Location: ____ Address: _____ Gate Code: _____ Project Manager:_____ Contact #: _____ Uses two Isokern DM54 Chimneys or Eco-steel Metal Chimney Pipe. - 53 1/2"-Steel angle iron: 4" x 6" x 3/8" cut to 73½" long to span firebox opening will be needed to 44 3/4" **Top View** 85 3/4" 8" 85 ¾" 38'

maintain 1 1/2"

clearance to combustibles.

Refer to product manual for further

installation instructions. **Plan View**

FIREPLACE OPTIONS

Hearth Height:_____ Brick Type:_ Brick Color: ___

Front View

Brick Pattern: ____

Damper: _ Chimney Type: ___

Offset:

Other Options: _ Spark Arrestor/Termination:___


Enervex RSHT Chimney Fan: ___

Decorative Termination:

Gas Log Set: Wood Grate: ___

Notes:			

MINIMUM FRAMING DIMENSIONS

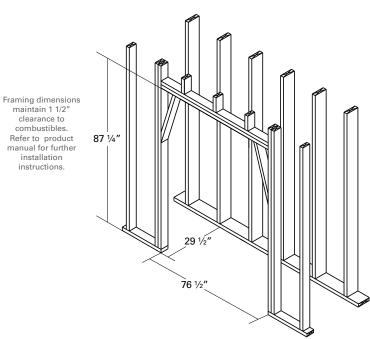

The total weight for the Magnum 60" fireplace is approximately 2652 lbs. This dry weight includes fireplace pumice components only, additional weight from mortar, damper, firebrick and chimney not included.

Side View