


Glass Front - 48, 72, 96 & 120

requires 6" x 6" x 1/2" Steel Angle cut to span firebox opening. This item is not included in the components and can be sourced locally.



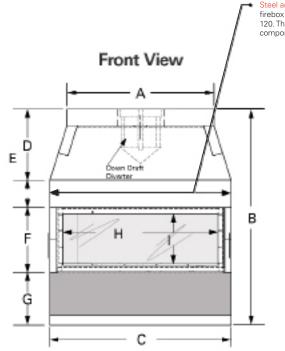





>	Model	А	В	С	D	Е	F	G	Н	1
/iew	48	43"	62 1/8"	52 ¾"	20 5/8"	8"	18 1/8"	15 3/8"	45 3/16"	15"
	72	76"	62 1/8"	85 ¹³ / ₁₆ "	20 5/8"	8"	18 1/8"	15 ¾"	78 1/4"	16 5/8"
Front	96	99 1/4"	62 1/8	109"	20 %"	8"	18 1/8"	15 3/8"	100 %"	16 %"
ш	120	122 1/4"	62 1/8	132"	20 5/8"	8"	18 1/8"	15 3/8"	124 1/8"	16 %"

	Model	В	D	F	G	J	K	L	М	Ν
View	48	62 1/8"	20 5/8"	18 1/8"	15 3/8"	29 1/8"	12 3/8"	2 3/4"	5"	25 1/4"
	72	62 1/8"	20 5/8"	18 1/8"	15 3/8"	29 1/8"	12 3/8"	2 3/4"	5"	25 1/4"
Side	96	62 1/8"	20 %"	18 1/8"	15 3/8"	29 1/8"	12 3/8"	2 3/4"	5"	25 1/4"
0,	120	62 1/8"	20 5/8"	18 1/8"	15 3⁄8″	29 1/8"	12 3/8"	2 3/4"	5"	25 1/4"

	Model	С	О	Р	Q
View	48	52 ¾"	48"	34 11/16"	28"
	72	85 13/16"	81 1/4"	67 11/16"	28"
Plan	96	109"	103 5/8"	89 11/16"	28"
	120	132"	127 1/8"	116 11/16"	28"

1.800.642.2920 EARTHCORE.COM

10 Office locations Over 400 Dealers.



Maximus Linear Series

Product Details & Specifications





APPLICATIONS:

Indoor
Natural Gas
LP (Liquid Propane)
Custom Finish
Combustible Floor Installation
Zero Clearance to Open Front
Single 12" B-Vent Chimney
Isoflames Linear Burner
Glass Media
Electronic Ignition System
Mechanical Exhaust Fan

Same pumice, sleek new design. Introducing the Maximus Linear Series with Open or Glass Front.

The Maximus Linear Series is a touch of modern sophistication and a work of art, all in one. It's sleek design can be customized to


fit any aesthetic. Choose an open front or glass front firebox and finish it off with your choice of colored glass media or log sets in a driftwood or birch finish.

Model sizes include 48, 72, 96 and 120. All Isokern Linear Fireplaces come with a Remote-Controlled Electronic Ignition System and Mechanical Exhaust Fan.

Open Front - 48, 72, 96 & 120

Please Note: This unit utilizes a single 12" BVent Chimney that can be terminated vertically or horizontally. All units are power vented. Zero Clearance to glass front. Models 72, 96 & 120 requires 6" x 6" x 1/2" Steel Angle cut to span firebox opening. This item is not included in the components and can be sourced locally.

	Framing & Weight	
Model	Minimum Framing	Weight
48	(56"w) x (51"h) x (29 1/2"d)	1275 lbs
72	(89"w) x (51"h) x (29 1/2"d)	1990 lbs
96	(112"w) x (51"h) x (29 1/2"d)	2450 lbs
120	(135"w) x (51"h) x (29 1/2"d)	2997 lbs

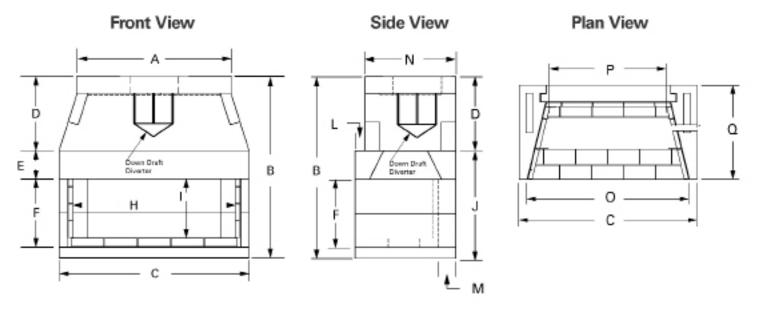

>	Model	А	В	С	D	Е	F	Н	I
<u>e</u> j	48	43"	51"	52 ¾"	20 %"	8"	18 1/8"	45 3/16"	16 ¾"
<u> </u>	72	76"	51"	85 ¹³ / ₁₆ "	20 5/8"	8"	18 1/8"	78 1/4"	16 3/8"
ront	96	99 1/4"	51"	109"	20 %"	8"	18 1/8"	100 %"	16 3⁄8″
ш	120	122 1/4"	51"	132"	20 5/8"	8"	18 1/8"	124 1⁄8″	16 3/8"

	Model	В	D	F	J	L	М	N
/iew	48	50 1/16"	20 5/8"	18 1/8"	45 3/16"	2 3/4"	5"	25 1/4"
	72	50 1/16"	20 %"	18 1/8"	78 1⁄4"	2 3/4"	5"	25 1/4"
Side	96	50 1/16"	20 %"	18 1/8"	100 5/8"	2 3/4"	5"	25 1/4"
-0,	120	50 1/16"	20 5/8"	18 1/8"	124 1/8"	2 3/4"	5"	25 1/4"

	Model	С	0	Р	Q
View	48	52 ¾"	48"	34 11/16"	28"
	72	85 13/16"	81 1/4"	67 11/16"	28"
Plan	96	109"	103 5/8"	89 11/16"	28"
-	120	132"	127 1/8"	116 11/16"	28"